


PRODUCT DESCRIPTION

Use: Provides a safe, stable and maintenance-free walkway for quick and easy access to rooftop equipment in high traffic areas.

Material: 3.81mm thick, textured non-reinforced TPO (thermoplastic polyolefin).

Colour: Grey

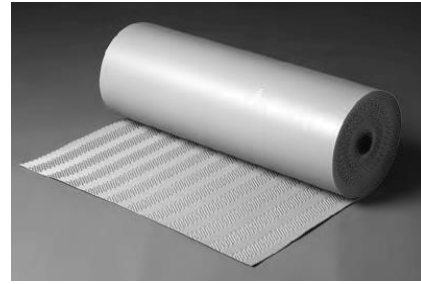

INSTALLATION/APPLICATION

When installing Nuraply TPO Walkpads, be sure to:

Achieve full weld around perimeter of the material.

Install textured side up.

Minimize installing over seams and membrane splices whenever possible.

On mechanically fastened systems, avoid installing over the disc.

Refer to the Nuraply TPO application instructions and detail drawings.

PHYSICAL PROPERTIES

| | |
|-----------------|-----------------------|
| Weight per Unit | 2.27kg/m ² |
|-----------------|-----------------------|

PACKAGING AND DIMENSIONS

| | |
|-------------------|---------------------------|
| Roll Size | 76.2cm x 15.24m |
| Thickness | 3.81mm |
| Coverage per Roll | 11.61m ² gross |
| Weight per Roll | 26.3kg |

ENERGY AND ENVIRONMENT INSTALLATION/APPLICATION

| | |
|-------|---|
| LEED® | Recycled Content: Post-consumer: 0% Post-industrial: 50% |
|-------|---|

STORAGE

Store indoors, out of direct sunlight, in a cool, dry location.

WARRANTY INFORMATION

Approved for use in any Nuraply TPO Membrane Warranty.

The information in this product data sheet is based on our experience and testing. It represents the latest information available at the time of printing, but no guarantee of its accuracy is made or implied, nor responsibility taken for use to which this information may be put. We reserve the right to alter or up-date information parameters and formulations at any time without notice.